
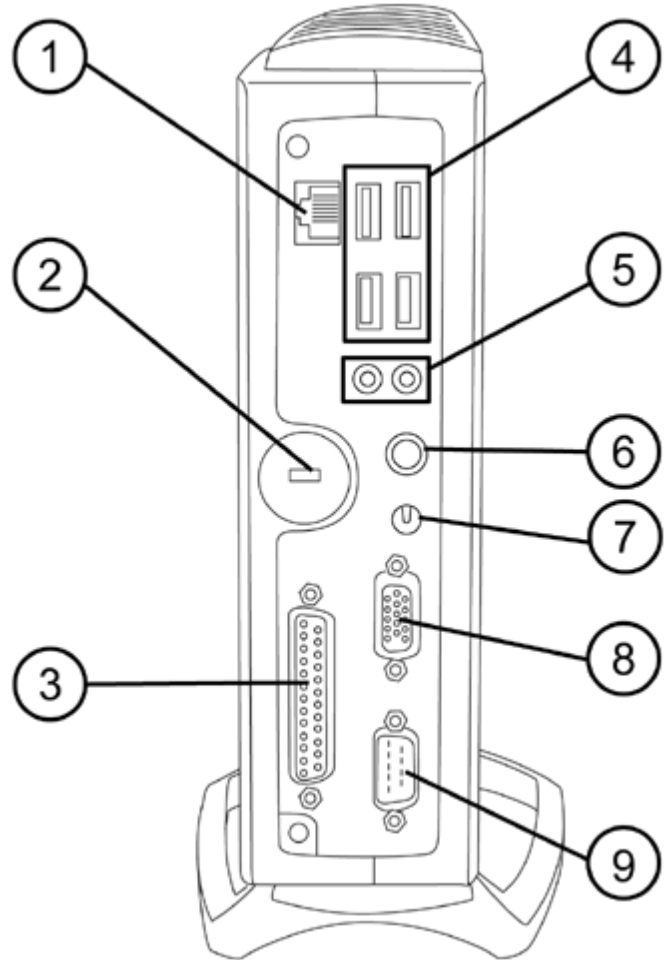


Overview

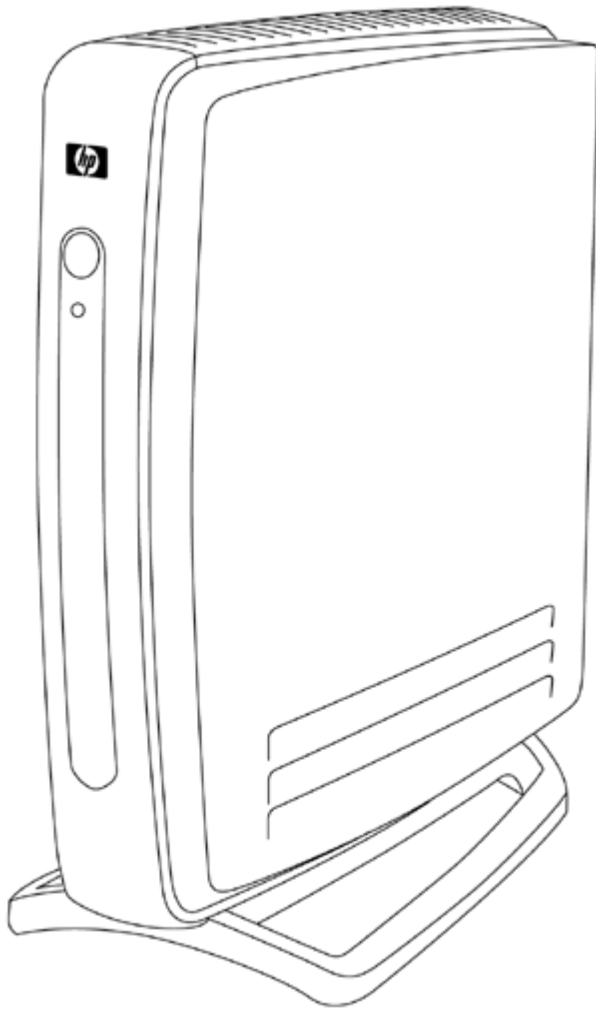

1. 10/100 RJ-45
2. Security lock
3. Parallel Connector
4. USB Connectors
5. Audio connector (mic in/line out)
6. PS/2 Connector
7. DC Power Input
8. Video Connector
9. Serial Connector

At A Glance

- Enhanced features for mainstream business use
- Simple, more secure manageability for the enterprise with Altiris Deployment Solution
- Helps lower ownership costs and increase resource efficiency for each end-user
- 400 MHz processor
- 128 MB DDR SDRAM standard (**NOTE: 16 MB system RAM reserved for video graphics usage**)
- 32 MB Flash
- Legacy support includes parallel, serial and PS/2 connections along with four USB 2.0 ports
- Support for selected options and peripherals
- Protected by Hewlett-Packard Services, including a limited three-year hardware warranty – certain restrictions and exclusions apply

Standard Features - Models

PU896AA#ABA / PU896AT#ABA	Processor	VIA Eden 400 MHz
	Flash	32 MB
	Memory	128 MB DDR SDRAM (NOTE: 16 MB of system RAM is reserved for video graphics usage)
	USB support	2.0
	Operating System	Linux kernel 2.4
	Client Management Software	Altiris Deployment Solution

RA525AA#ABA (TAA compliant) ¹	Processor	VIA Eden 400 MHz
	Flash	32 MB
	Memory	128 MB DDR SDRAM (NOTE: 16 MB of system RAM is reserved for video graphics usage)
	USB support	2.0
	Operating System	Linux kernel 2.4
	Client Management Software	Altiris Deployment Solution
	NOTE ¹ : Product complies with U.S. Trade Agreement Act (TAA). Available in U.S. only.	

Options

Monitors	CRT Monitors	
	HP s7540 17" (16.0" vis) CRT Monitor	PF997AA#ABA
	HP v7650 17" (16.0" vis) Flat-face CRT Monitor	PF996AA#ABA
	TFT Monitors	
	HP L1506 15" TFT Flat Panel Monitor – Analog only	PX848AA#ABA
	HP L1706 17" TFT Flat Panel Monitor – Analog only	PX849AA#ABA
	HP L1740 17" TFT Flat Panel Display – Analog/Digital	PL766AA#ABA
	HP L1755 17" TFT Flat Panel Display – Analog/Digital	PL777AA#ABA
	HP L1906 19" TFT Flat Panel Display – Analog only	PX850AA#ABA
	HP L1940T 19" TFT Flat Panel Display – Analog/Digital	EM869AA#ABA
	HP L1955 19" TFT Flat Panel Display – Analog/Digital	PD974AA#ABA
	HP LP2065 20" TFT Flat Panel Display – Analog/Digital	EF227A4#ABA
	HP LP2465 24" TFT Widescreen Flat Panel Display – Analog/Digital	EF224A4#ABA
	HP L5006tm 15" Touchscreen Flat Panel Monitor	RB146AA#ABA
ELO Touch 1526C CRT – USB/Serial	139862-001	
ELO Touch 1515L Flat Panel – USB/Serial	E72932-000	
Security	Compaq Security Lock	294316-B21;
	SCM Smart Card SCR331; please visit the sites below to purchase	DC368A
	http://www.txsystems.com/scm.html	SCR331
	http://www.envoydata.com	
	http://www.digital-privacy.com/index.php	
Storage	Apacer 256 Disk on Key (http://www.apacer.com/private/hsorderform/hsregion.htm)	AP-HHR256HD2
	Apacer 512 Disk on Key (http://www.apacer.com/private/hsorderform/hsregion.htm)	AP-HHR512HD2
	Apacer 1-GB Disk on Key (http://www.apacer.com/private/hsorderform/hsregion.htm)	AP-HHR100HD2
	HP External MultiBay	DC373B
	HP MultiBay 1.44-MB Diskette Drive (requires External MultiBay)	DC362A
	HP MultiBay 24X CD-ROM Drive (requires External MultiBay)	DC513B
	HP MultiBay 60-GB Hard Drive (requires External MultiBay)	DC894A
	HDD 80-GB 5400rpm	DC920A
	HP 512-MB DriveKey II – USB Flash Drive	ED516AA
Communications	Linksys Ethernet Bridge	WET54G
	Linksys Ethernet Bridge	WET54GS5

Options

Connectivity	HP PS/2 Keyboard	DT527A
	HP USB Standard Keyboard ALL	DT528A
	HP USB Smartcard Kybd (Cbnt/Slv ALL)	ED707AA
	HP PS/2 2-Button Scroll Mouse ALL	DD440B
	HP USB 2-Button Scroll Mouse ALL	DD441B

Printers	HP Deskjet 5650 (USB and parallel)	C6490A
	HP Deskjet 6122 (USB and parallel)	C8954B
	HP LaserJet 1320 (USB and parallel)	Q5927A
	HP Deskjet 5850 (USB, NIC and wireless)	C8975A
	HP Deskjet 6127 (USB and NIC)	C8959B
	HP LaserJet 1160 (USB and parallel)	Q5917A (Black) Q5933A (Opal)

Accessories	Mounting Bracket	DY928A
	t5700 40W AC Adapter ALL	DZ991A
	HP/Kensington Cable Lock	PC766A

Care Packs*	9x5 Next-Business-Day Advanced Exchange – 3 Years	331653-001; U4847E
	9x5 Next-Business-Day On-Site Coverage – 3 Years	331655-001; U4849E

*U4847E is available in all regions; U4849E is available in Americas and Asia-Pacific/Japan.

Technical Specifications

Processor	VIA Eden 400 MHz		
Memory	Flash	32 MB	
	System Memory	128 MB of DDR SDRAM (NOTE: 16 MB of system RAM is reserved for video graphics usage)	
Graphics	Mode	Refresh Rates	Color Depth
	640 x 480	60, 75, or 85 Hz	8-, 16-, or 24-bit
	800 x 600	60, 75, or 85 Hz	8-, 16-, or 24-bit
	1024 x 768	60, 75, or 85 Hz	8-, 16-, or 24-bit
Input/Output/ Peripheral Support	Keyboard	USB (keyboard included), PS/2	
	Mouse	USB (mouse included), PS/2	
	Printer	Local and/or network printers (RDP, ICA, LPD, JetCET)	
	Video	VGA-type video output (DB-15)	
Audio	Output	Internal amplified speaker, 1/8-inch mini, full 16-bit stereo, 44-kHz sample rate	
Security	Security lock slot (cable lock sold separately)		
Server-based computing protocols	Citrix ICA and rdesktop for remote server access, X-terminal		
Networking	TCP/IP with Dynamic DNS and DHCP support		
	10/100 BaseT Fast Ethernet, twisted pair (RJ-45)		
	Direct Connection through Point-to-Point Protocol (PPP), Point-to-Point over Ethernet (PPPoE), VPN Connection through MS Point-to-Point Tunneling Protocol (PPTP), Layer-2 Tunneling Protocol (L2TP)		
	Wake on LAN, PXE		
I/O ports and connectors	Four USB 2.0 ports, 1 serial, 1 parallel, 1 PS/2		
Resident Operating System	Linux kernel 2.4		
Server OS Compatibility/Support	Microsoft® Windows® NT Server 4.0 family, Microsoft Windows 2003 Server family, Microsoft Windows 2000 Server family (except data center addition); Microsoft Windows 2003 Server Terminal Services, Citrix Presentation Server, Linux, and Unix		
Software Included	Linux 2.4		
	Firefox 1.x browser with Sun Java , Adobe Acrobat Reader , Citrix ICA, rdesktop RDP client, SSH, HP Connection Administrator, and VNC		
	Metrowerks supports the HP Compaq t5125 with a Board Support Package designed for use with Metrowerks Platform Creation Suite to allow more extensive image customizations. See www.metrowerks.com/MW/Develop/Embedded/Linux/hpthinclient.htm		
	Altiris Deployment Solution (client agent) preinstalled. Altiris Deployment Solution (management console) available as free download from Altiris at: www.altiris.com/hptc		
Languages	X-terminal compatibility		
Dimensions H x W x D (approximate)	Without stand	2.2 x 8.2 x 7.8 in (55 x 205 x 195 mm)	
	With stand	9.2 x 4 x 7.8 in (230 x 100 x 195 mm)	
Weight (approximate)	With stand	2.90 lb (1.32 kg)	

Technical Specifications

Environmental	Temperature range on	50° to 104° F (10° to 40° C)
	Temperature range off	-22° to 140° F (-30° to 60° C)
	Humidity	20% to 80% condensing/10% to 95% non-condensing
	Power	Worldwide auto-sensing 100-240 VAC, 50-60 Hz energy-saving automatic power-down
Regulatory Compliance	Ergonomics	German ZH1/618; EN29241-3, approved
	Safety	UL 1950, CSA 950; TÜV-GS (EN60 950) approved
	RF Interference	FCC Class B; CE Mark; EN55022B; VCCI
Warranty	Three-year limited hardware warranty. The software is comprised of open source community code, third-party licensed code, and HP code and is provided without warranty. NOTE: Certain restrictions apply. Consult the HP Customer Support Center for details.	

©Copyright 2006 Hewlett-Packard Development Company, L.P.

Microsoft, Windows, and Windows NT are trademarks and/or registered trademarks of Microsoft Corporation in the United States and other countries.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products and services are set forth in the express limited warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.